


## **Data Sheet**

## Eclipse Ultimate concealed bearing Grade 14 hinge







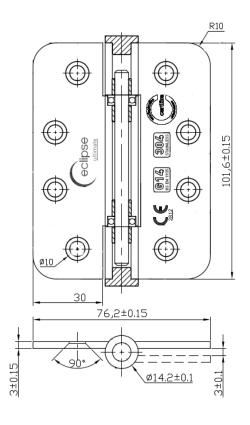

Eclipse hinge testing & assessments have been conducted by the recognised UK industry leader in this field, Element Warrington Fire. Enabling you to specify with confidence, knowing that each product is backed up by accurate, up to date and bona fide test evidence.















- CE marked
- CF 5837 Certifire
- Grade 14 (160 kgs)
- Grade 304 Stainless steel
- 10mm Radius corners
- EN1935 performance tested to 200,000 cycles
- EN1634 fire rated
- FD 30, 60, 90, 120 fire rated on timber doors
- FD 240 fire rated on steel doors
- 10x1.1/4" stainless steel fully threaded pozi drive screws supplied.
- Suitable for doors 44-54mm thick
- 160 kg max door weight includes furniture & fixtures that increase door mass
- Concealed bearing maintenance free
- Intumescent hinge pads must be used with the product for fire door compliance

Ref	Size	Grade	Qty	Finish
14332	102x76x3mm	14	2pk	SSS
14333	102x76x3mm	14	2pk	PSS
14334	102x76x3mm	14	2pk	BLK

www.frisco.co.uk 01992 443 010 sales@frisco.co.uk